



Getting Your Multifunction Back On Your Network After A Router Or Network Change

PIXMA MX432 / MX439

Macintosh OS



If any of the following situations exist


- You have replaced your Router or Access Point
- You want to use a different wireless network
- Router settings have been changed.

Please complete the following steps to apply the new configuration settings to your multifunction.

Preparing to Connect My Multifunction To My Network

Network Requirements

Before connecting the machine to the network, make sure that configuration of the computer and access point or router is complete, and that the computer is connected to the network.

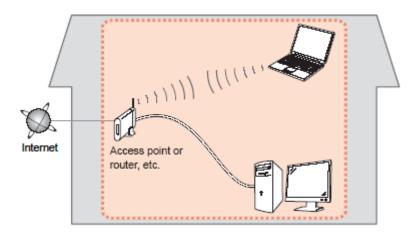


Wireless Connection

Before connecting the machine to the network, the computer needs to be connected to the network. Make sure that configuration of the computer and access point or router is complete.

<< Previous

Next >>

Preparing to Connect My Multifunction To My Network

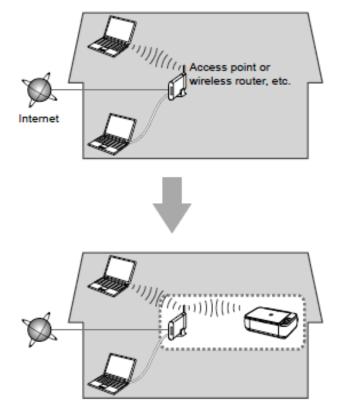



An "Ad-hoc connection," which establishes a direct wireless connection between the computer and printer without using an access point, is not supported.

<< Previous

Next >>

A router or access point is required for your printer to be used on a wireless network.

Notes on Network Connection

- The configuration, router functions, setup procedures and security settings of the network device vary depending on your system environment. For details, refer to your device's instruction manual or contact its manufacturer.
- In an office setup, consult your network administrator
- If you connect to a network that is not protected with security measures, there is a risk of disclosing data such as your personal information to a third party.
- If an error message appears or if you have trouble with the network connection, refer to the printed manual: Network Setup Troubleshooting.
- Place the machine and computer on the same network segment.


Installing the PIXMA MX432 / MX439 on Your Wireless Network

If you are reinstalling your printer on your network, a step-by-step walk through of the wireless setup is built in to the installation routine of the software that shipped with your PIXMA.

*Insert the Setup CD-ROM that came with your printer into your CD-ROM drive and proceed through the easy to follow instructions.

*If you don't have or cannot use the Setup CD-ROM, you can still install the printer using a downloaded file. <u>Click here for information</u>.

If the following screen appears, click Start Setup Again

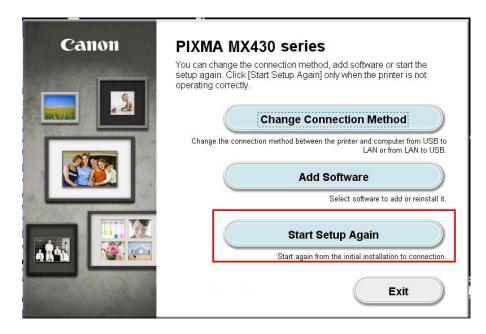



If the following screen appears, click Continue Installation

PIXMA MX430 series		
	version is unsupported. Installation may not complete correctly. Click Latest Info] to access Canon's website and check the latest information.	
After checking the latest informat	After checking the latest information, click [Continue Installation] to continue installation. Click [Cancel Installation] to cancel installation.	
installation. Click [Cancel Installat		

Be sure to select Wireless Connection on the Connection Method Selection screen (1-1).



Continue carefully following the **Preparation for Connection** (1-2) and **Printer Setup** instructions (Steps 2-1 through 2-5) until the **Setup Procedure Selection** screen (3-1) appears. This is shown on the next page.

<< Previous <u>Next >></u>

The printer automatically searches for access points that support WPS (Wi-Fi Protected Setup)*.

*Unless you are absolutely sure your access point supports WPS and you are familiar with activating this on your access point, **press the Stop button** on the printer's operation panel and click on **Other Methods** on the **Setup Procedure Selection** screen (screenshot shown below)*.

If the **Push Button Method** is not shown on the printer's operation panel (when no WPS access points have been detected), select **Standard setup** on the printers operation panel, then click **Other Methods** on the **Setup Procedure Selection** screen

3-1 Setup Procedure Selection		-
Click the method below that mate your printer.	ches the screen displayed on	
Press WPS button about :	Wireless LAN setup Standard setup	
Push Button Method	Other Methods	
If the Push Button Method screen is displayed on the printer but you are unsure if your	After clicking Other Methods, select "Wireless Setup Using the USB Cable" in the next step.	
access point or router supports this technology, press the Stop button and choose Other Methods.	If your access point supports WPS, this method can also be selected.	
		-

If you selected the **Push Button Method**, follow any remaining instructions to complete setup. <u>Skip ahead to instructions</u>

If you selected **Other Methods**, please continue to the next page for important information



On the **Setup Procedure Selection** screen (3-2) screen, select **Wireless Setup Using the USB Cable**. This is the recommended setup method. You will need to use the supplied USB cable



Continue to follow any on-screen instructions until the Software Installation List appears. This screen is shown on the next page



On the Software Installation List select any additional* software to install and click Next.

*MP Drivers is required for installation and cannot be deselected. In addition, we recommend installing MP Navigator EX and Easy-PhotoPrint EX in order to take full advantage of your printer's features.

*If you are using the downloaded 'Mini Master setup' file to install the printer, only the MP Drivers and Canon IJ Network Tool will be installed. Additional software can be downloaded separately. The software can be found in the Software section of Drivers & Software (the same page where you downloaded the Mini Master setup file)

he Nex	ftware Installation List selected software will be installed. Make su t]. need to install all the software below to use	-	install is selected, and then click
	MP Drivers	190 MB	Drive 10.8 80560 MB free space
	ScanGear	90 MB	
ī	On-screen Manual	250 MB	
	MP Navigator EX	95 MB	
	Speed Dial Utility	10 MB	Total used space: 210 MB
	Easy-PhotoPrint EX	610 MB	
	Solution Menu EX	20 MB	
✓	Canon IJ Network Tool	20 MB	
			Select All
			Clear All
	Back		Next

If you selected the **Push Button Method** to set up your connection, continue to follow any remaining on-screen instructions to finish and exit setup.

If you are using the **Wireless Setup Using the USB Cable** connection procedure, continue to the next page.



The drivers and software will install. Continue to follow the on-screen instructions.

Connect the supplied USB cable to the printer and computer when the **Connect Cable** screen appears. Click **Next**.



The Connect Cable screen closes automatically after the printer is detected



If the Access Points screen appears:

Select the Access Point to connect to, enter the Network Key (password) and click Connect.

*For details on how to check the Access Point name/network name (SSID) and network key, refer to the manual supplied with your access point or contact its manufacturer.

-	_	Access Points	
		ss points were detected.	
elect	the access p	oint to connect to, and click [Cor	nnectj.
-			
	ed Access Po		
Level	Encryption	Access Point Name (SSID)	Channel
T.	WPA	abcdefg	6
T a	WPA2	abcdefg	6
T.	WPA	MyNetwork	11
		Network Info	rmation (Update)
o con	nect to this	access point, enter the network	password and then click
Conne		iccess point, enter the network	password, and then click
letwo	rk Password:		
or the	e network pa	ssword, click the [?] at lower left	
or the	e network pa need to conf	gure the printer network setting	
For the	e network pa need to conf		
For the	e network pa need to conf	gure the printer network setting	
For the	e network pa need to conf	igure the printer network setting ick [Manual Setup].	

If the Confirm Connection Access Point screen appears:

Click Yes to confirm the Access Point .



Confirm Connection Access Point

Printer's network connection will be set up by connecting to the following access point. Do you want to continue?

Access Point: My_Network

Clicking [Yes] will let this software obtain access point information saved in your keychain. If the 'Confirm Access to Keychain' dialog appears, click [Allow].

If you want to select the connection access point manually, click [No].


Yes

Next >>

<< Previous



Disconnect the USB cable when the Disconnect Cable screen appears. Click Next

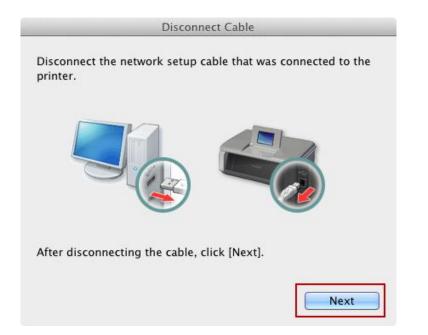

Setup is now complete. Follow any remaining instructions to exit the setup program.

Installing the PIXMA MX432 / MX439 on Your Wireless Network

If you can't find your CD-ROM, you may download the MX430 series Mini Master Setup, which includes the same step-by-step installation as the CD-ROM, by following the instructions below:

- 1. Click here to access the MX432 Drivers & Software page.
- 2. Select the operating system of your computer in the dropdown lists (see example below).
- 3. Expand the 'Drivers' section, if necessary, by clicking the red triangle.
- 4. Click on the 'MX430 series Mini Master Setup' entry.
- 5. After reading the license agreement, click 'I Agree Begin Download' and save the file to your computer.
- 6. Once the download is complete, double-click the file from its download location to begin the installation.
- 7. Follow the same instructions as you would if using the Setup CD-ROM. Click here to go to instructions.

Drivers & Software

Select an Operating System and OS Version from the drop down menu below then click c view the latest supported files for your product. Click on the file description to navigate to click on "I Agree - Begin Download" to start downloading.

